

Preliminary

C-BAND 8.5kW Transmitter

RRK56578K5-79A



Product Features

- 8.5kW Pulsed Transmitter
- Frequency from 5.6 GHz to 5.7 GHz
- Using High-Efficiency GaN Transistor
- Control Communication RS422
- Real time status of Amplifier over Ethernet
- WR187 Waveguide Output
- Internal Power supply unit
- Forced Air Cooling

Applications

- Radar
- Weather Radar
- High Power RF Application



Description

The RRK56578K5-79A uses GaN transistors and is designed for the high power radar applications at 5600 ~ 5700 MHz. This solid-state transmitter allows upgrading the existing VED (Vacuum Electronic Device, such as Klystron, Magnetron, Travelling Wave Tube, and Cross Field Amplifier) based transmitter for radar platforms.

Electrical Specifications @ $V_{ac}=240V$, 50 & 60Hz, $T_o = 25\text{ }^{\circ}C$, 50 Ω Input System

PARAMETER	UNIT	MIN	TYP	MAX	SYMBOL
Operating Frequency	GHz	5.6	-	5.7	f_o
Operating Bandwidth	MHz	-	-	100	BW
Output Pulse Power	kW	8.5	-	-	P_o
Input Pulse Power	dBm	-11.5	-	-8.5	P_i
Power Gain	dB	-	79	-	G_p
Power Gain Variation	dB	-	-	1	ΔG_p
Duty Cycle	%	-	-	10	DC
Pulse Width	us	1	-	100	PW
Amplitude Pulse Droop	dB	-	-	1.0	Droop
Pulse Rise Time/ Pulse Fall Time	ns	-	-	200	T_r / T_f
Spurious	dBc	-	-	-60	Spur
Harmonics 1 to N	dBc	-	-	-40	H_N
VSWR	-	-	-	2.0 : 1	VSWR
Output Power Monitoring	dBc	-62.5	-	-57.5	P_M
Operating Voltage	VAC	+216	-	+264	AC
	Hz	50	-	60	V_F
Gate Pulse Interface	-	RS422 Differential			C_i
Protection & Warning Alarm (Ethernet & LEDs, Real time status)	-	RVS Power		> VSWR 3 : 1 / Shutdown	
	-	Over Duty Cycle		> 10 % / Shutdown	
	-	HPA Over Temp(each)		> 95 $^{\circ}C$ / Shutdown	
	-	HPA Alarm(each)		Output power / Alarm	
	-	Pre Driver Alarm(each)		Input & Output power / Alarm	

Preliminary
C-BAND 8.5kW Transmitter
RRK56578K5-79A



	-	Communication & PSU, Interlock	Shutdown
	-	FAN(each)	Alarm

Absolute Maximum Ratings

PARAMETER	UNIT	VALUE
Operating Flange Temperature	°C	+5 ~ + 40 °C
Storage Temperature	°C	- 40 ~ + 70 °C


Mechanical Specifications

PARAMETER	UNIT	VALUE
Dimensions	-	21inch Rack Mount, 12 U 740 × 638 × 1,038 (W × H × D, mm) (Height excluding wheels & eye bolts)
Weight	kg	≤ 210
RF Input Type	-	SMA(Female)
RF Output Type	-	WR187 Choke
RF Output Monitor Type	-	SMA(Female)
Pre-Driver Amp. Output Monitor Type	-	SMA(Female)
Gate Pulse Connector	-	MIL STD D38999 Type
Status Connector	-	RJ45 Type
Power Connector	-	MIL STD D38999 Type
Cooling	-	Forced Air Cooling

Preliminary
C-BAND 8.5kW Transmitter
RRK56578K5-79A



Block Diagram

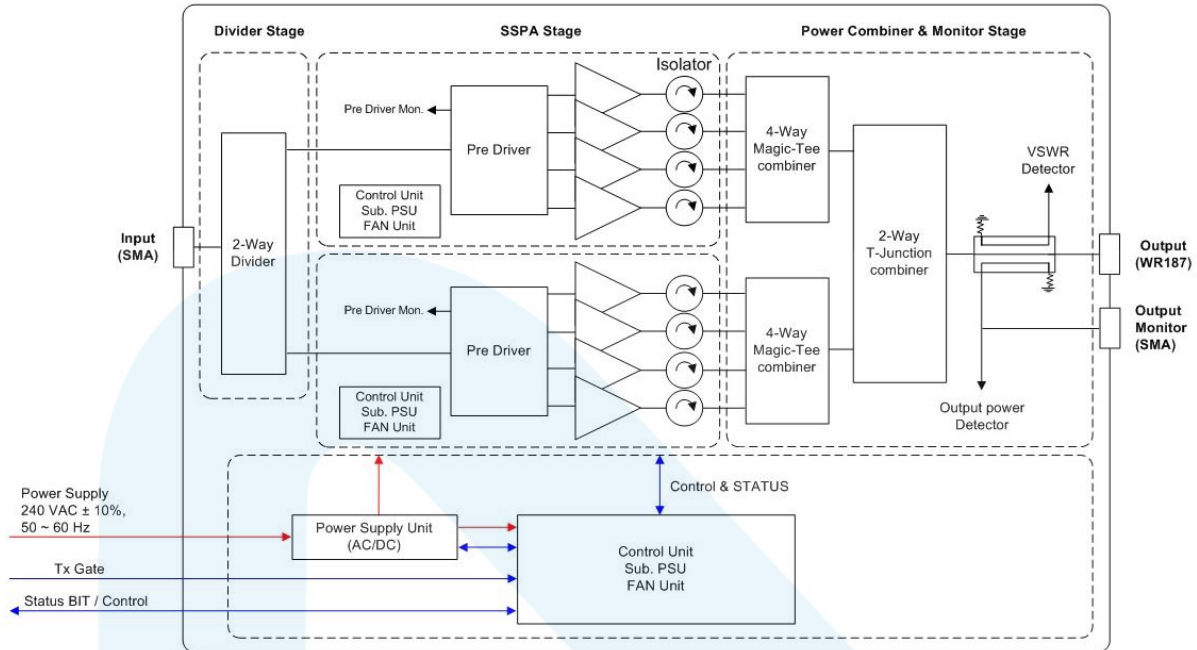


Preliminary
C-BAND 8.5kW Transmitter
RRK56578K5-79A




Mechanical Drawing(TBC)


unit: mm
[inch]

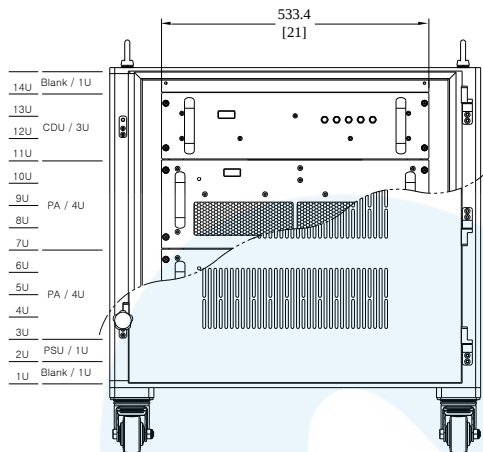


Without Door View

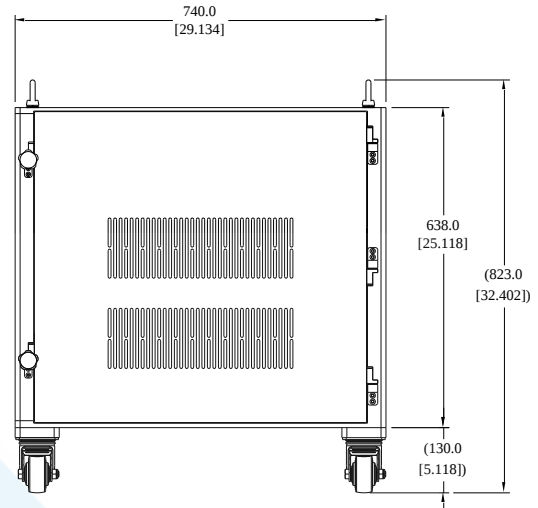

Front

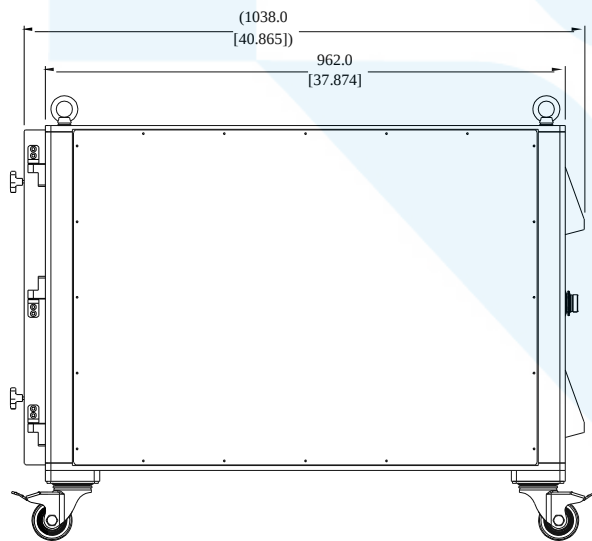

Side

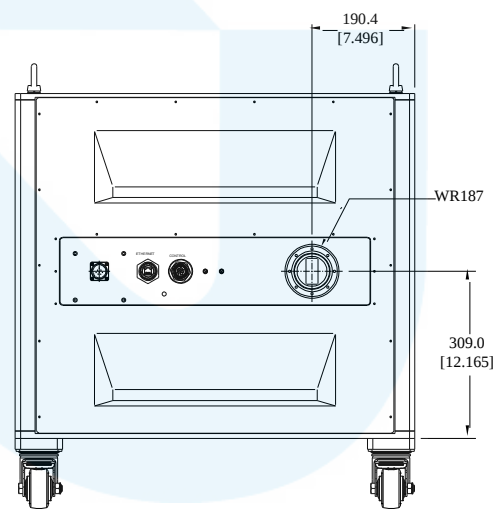

Rear

Preliminary
C-BAND 8.5kW Transmitter
RRK56578K5-79A



Revision History

Part Number	Release Date	Version	Description	Data Sheet Status
RRK56578K5-79A	May. 9 th . 2024	0.1	Initial release	Preliminary

* All the data in this document may be subject to change without prior notice.



Certification

This product is manufactured by a company that is certified for the AS9100D quality management system.

RFHIC Corporation reserves the right to make changes to any products herein or to discontinue any product at any time without notice. While product specifications have been thoroughly examined for reliability, RFHIC Corporation strongly recommends buyers to verify that the information they are using is accurate before ordering. RFHIC Corporation does not assume any liability for the suitability of its products for any particular purpose, and disclaims any and all liability, including without limitation consequential or incidental damages. RFHIC products are not intended for use in life support equipment or application where malfunction of the product can be expected to result in personal injury or death. Buyer uses or sells such products for any such unintended or unauthorized application, buyer shall indemnify, protect, and hold RFHIC Corporation and its directors, officers, stockholders, employees, representatives and distributors harmless against any and all claims arising out of such unauthorized use. All sales inquiries and support should be directed to the local authorized geographic distributor for RFHIC Corporation. For customers in the US, please contact the US sales team through our website at <https://rfhic.com/rfhic-us/>. For all other inquiries, please contact our international sales team through our website portal at <https://rfhic.com/contact/>.