

Preliminary

GaN SSPA Microwave Generator

RCM251K6-20G



Product Features

- 2400~2500 MHz (ISM band)
- 1.6 kW CW Peak Power @ 50V
- Built with GaN-on-SiC HEMT Transistors
- Digital Adjustable of Power, Frequency, Phase
- Excellent Frequency Spectrum at both low and high-power levels

Applications

- Building Block for High Power Systems
- Microwave CVD Equipment
- Plasma Generation
- MW Heating and Drying
- Semiconductor Equipment



Description

RCM251K6-20G is a 1.6 kW, GaN solid-state microwave generator designed ideally for microwave heating and plasma generation applications. The RCM251K6-20G is a module type generator that provides continuous wave (CW) and or pulse output power adjustable from 50W to 1600W at frequencies ranging between 2400 MHz and 2500 MHz. The RCM251K6-20G is built using RFHIC's state of the art gallium-nitride (GaN) on silicon-carbide (SiC) transistors providing high power levels and high system efficiency. The RCM251K6-20G is equipped with its own phase-lock-loop (PLL) synthesizer allowing to generate a signal without any external source. This highly efficient and rugged device is targeted to replace conventional magnetrons used for industrial heating and drying applications.

Electrical Specifications

PARAMETER		UNIT	MIN	TYP	MAX	SYMBOL
Operating Frequency	Adjustable Range	MHz	2400	-	2500	F _o
	Step Size	kHz	500	-	-	F _{step}
Output Power	Adjustable Range	W	50	-	1600	P _o
	Step Size	W	5	-	-	P _{step}
Operating Mode		CW and or Pulse				
Power Spectrum Bandwidth		kHz	-	-	500	S _b
Frequency Accuracy & Stability		ppm	-2.5	-	2.5	F _s
Efficiency (DC to RF)		%	-	-	57	Eff
Operating Voltage		V	50	-	52	V _{DC}
Pulse Mode	Pulse Repetition Frequency	kHz	0.01	-	2	
	Pulse Length	ms	0.5	-	100	
	Pulse Width	us	500	-	-	

Preliminary
GaN SSPA Microwave Generator
RCM251K6-20G



Generator Alarm & Protection Features

PARAMETER	State	CONDITION
Output Power	Alarm	Output Power > 1.7 kW
Over-Temperature	Alarm	System Temperature > 50 C°
Reflected Power	Alarm	400W ~ 800W
PLL Unlock ⁽¹⁾	Disabled	-
Over-Temperature	Disabled	System Temperature > 55 C°
Reflected Power	Disabled	Reflected Power > 800W

***Remarks**

(1) A phase-locked loop (PLL) is a control system that generates an output signal whose phase is related to the phase of the input signal. The PLL is equipped with a voltage-driven oscillator that constantly adjusts to match the frequency of the input signal.

SSPA Head Mechanical Specifications

PARAMETER	UNIT	VALUE
Dimensions (W x D x H)	mm	200 x 361.5 x 53
SSPA Head Weight	kg	7.6
Microwave Output Port	-	7/16 DIN
DC & GND	-	DB-5W5 4-Pin (FEMALE)
I/O Connector		D-Sub 9-Pin (RS-232)
Cooling Requirements	-	Water Cooling Rate 5L/Min, 3Bar
		Cooling Water Inlet Temperature 20 °C~25°C ((typ.))
		Relative humidity below dew point (non-condensing)
Fluid Inlet/Outlet Size	Inch	1/4 Tapered Pipe Thread

Remarks: Dimensions and Connectors may be subject to change.

Environmental Specifications


PARAMETER	UNIT	VALUE
Operating Case Temperature ⁽¹⁾	°C	15 ~ 50
Environmental/Storage Temperature	°C	10 ~ 40

Remarks: **(1)** Operating case temperature is the temperature detected at the PA temp sensor.

Preliminary GaN SSPA Microwave Generator RCM251K6-20G



Mechanical Drawing

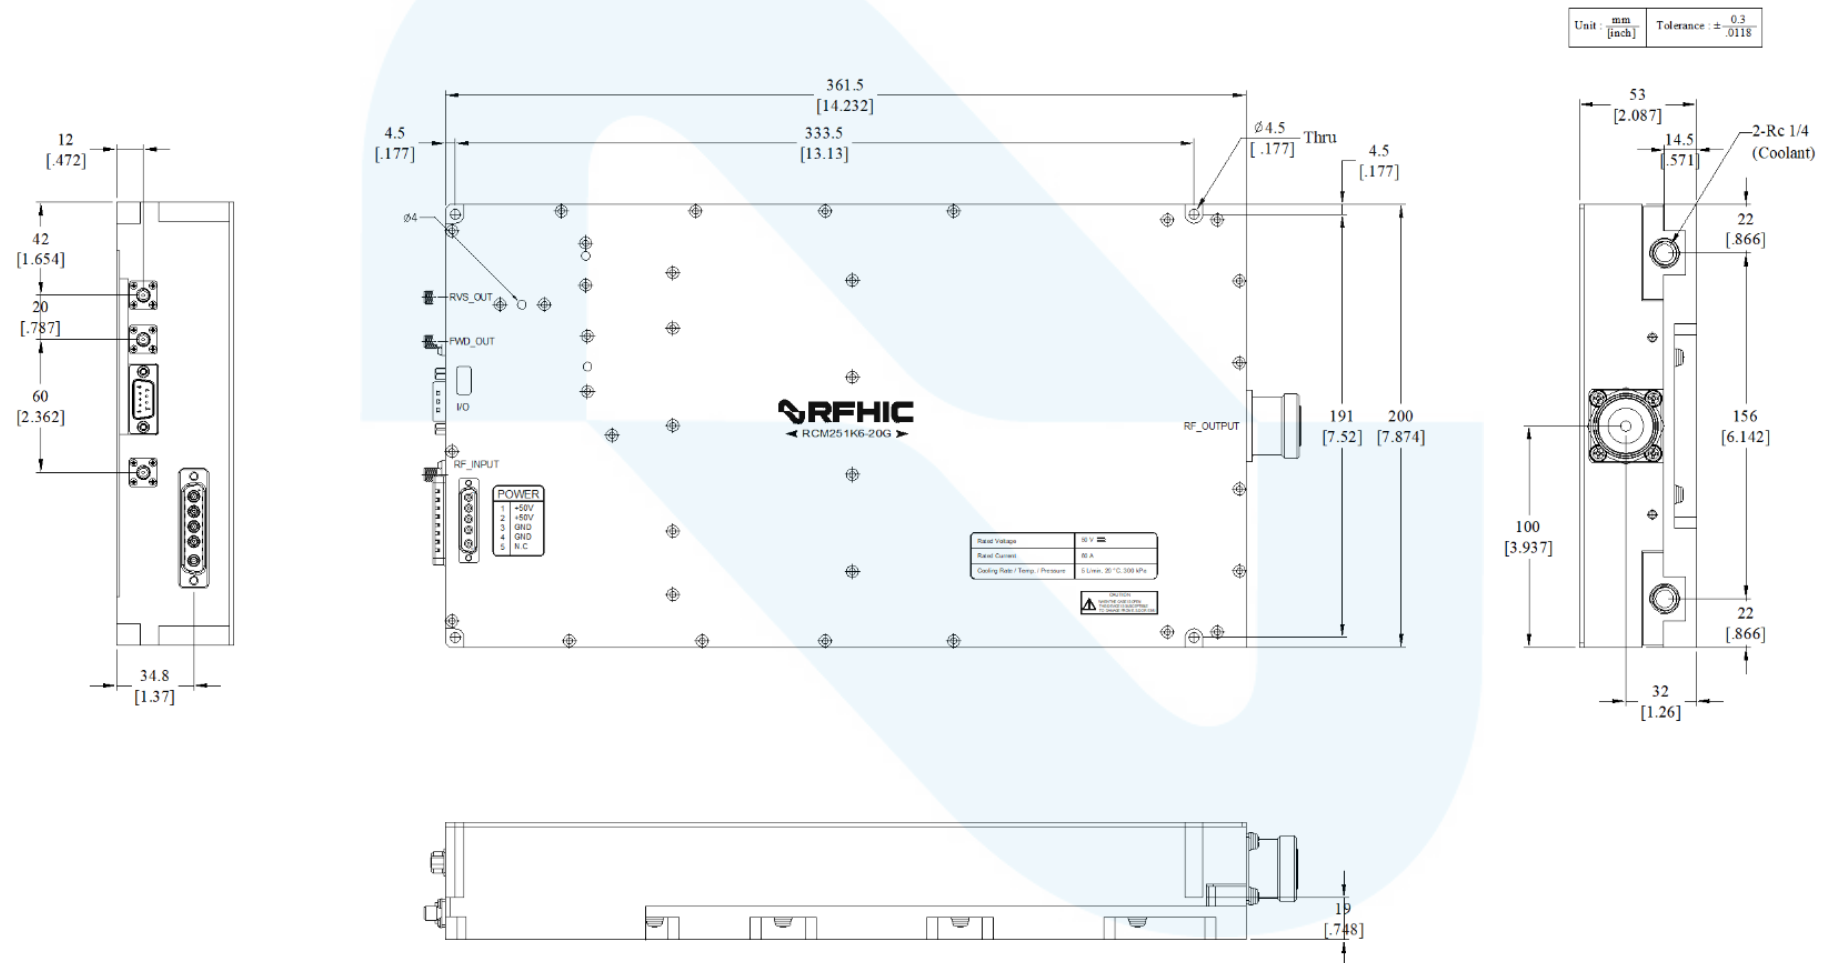

Preliminary
GaN SSPA Microwave Generator
RCM251K6-20G



Revision History

Part Number	Release Date	Version	Description	Data Sheet Status
RCM251K6-20G	2024.05.20	0.1	Initial Release	Preliminary
RCM251K6-20G	2025.06.18	0.2	Cooling, Drawing Change	Preliminary



Certification

This product is manufactured by a company that is certified for the AS9100D quality management system.

RFHIC Corporation reserves the right to make changes to any products herein or to discontinue any product at any time without notice. While product specifications have been thoroughly examined for reliability, RFHIC Corporation strongly recommends buyers to verify that the information they are using is accurate before ordering. RFHIC Corporation does not assume any liability for the suitability of its products for any particular purpose, and disclaims any and all liability, including without limitation consequential or incidental damages. RFHIC products are not intended for use in life support equipment or application where malfunction of the product can be expected to result in personal injury or death. Buyer uses or sells such products for any such unintended or unauthorized application, buyer shall indemnify, protect, and hold RFHIC Corporation and its directors, officers, stockholders, employees, representatives and distributors harmless against any and all claims arising out of such unauthorized use. All sales inquiries and support should be directed to the local authorized geographic distributor for RFHIC Corporation. For customers in the US, please contact the US sales team through our website at <https://rfhic.com/rfhic-us/>. For all other inquiries, please contact our international sales team through our website portal at <https://rfhic.com/contact/>