

Product Features

- GaN on SiC Broadband High Power Amplifier
- 400 ~ 2700MHz Operation Bandwidth
- Gain Flatness : Max ±2dB
- Output Power : Typical 49dBm(80Watt)

Applications

- Aerospace & Defense
- Military
- Electronic Warfare
- Rader
- SATCOM
- Communication
- EMI/RFI
- Jamming Systems



Description

The power amplifier module is designed for Broadcasting, Telecommunication, Medical and Other markets. Operating frequency range is from 400 ~ 2700MHz. Gallium Nitride on SiC technology is used and attached on an aluminum sub carrier. Full in/out matching for broadband performance is already applied. Improved thermal handling by patented technology.

Electrical Specifications @ $V_{DD} = 32V$; $T_c = 45^{\circ}C$; $Z_s = Z_L = 50\Omega$

PARAMETER	UNIT	MIN	TYP	MAX	CONDITION	
Operating Frequency	MHz	400	-	2700	-	
Small Signal Gain	dB	-	58	-	@ Pin -20dBm	
Power Gain	dB	47.0	49.0	-	@ Pin 0dBm	
Gain Flatness(p-p)	dB	-	±1.5	±2.0	@ Pin 0dBm	
Output Power (Pout)	dBm	47	49.0	-	@ Pin 0dBm	
Harmonic suppression	2 nd	dBc	10	-	-	CW 1-tone @ Pin = 0dBm
	3 rd					
Third-Order Intercept Point(OIP3)	dBm	-	54	-	2-Tone @ 40dBm/Tone, 1MHz Spacing	
Spurious Level	dBc	50			-	
Input VSWR	VSWR	-	-	2.5:1	-	
Supply Voltage	V	-	32.0	-	$V_{DD}(=V_{DS})$	
Power Added Efficiency	%		30		@ Pin 0dBm	
Quiescent Current consumption(Ibq)	A	-	1.7	2.0	-	
Current Consumption(IbD)	A	-	8	11	@ Pin = 0dBm	

Preliminary
Wideband Power Amplifier RWP0427100-53



Absolute Maximum Ratings

PARAMETER	UNIT	RATING
Input RF Power	dBm	3
Supply Voltage	V	36
Load Mismatch Value	-	3 : 1 @all load phase

* Input Signal Condition : CW 1-Tone

Environmental Characteristics

PARAMETER	UNIT	MIN	TYP	MAX	SYMBOL
Operating Flange Temperature	°C	-20	-	70	T _c
Storage Temperature	°C	-40	-	105	T _{stg}


Preliminary
Wideband Power Amplifier RWP0427100-53



Typical Performance @ $V_{DD} = 32V$; $T_c = 45^\circ C$; $Z_S = Z_L = 50\Omega$

Frequency	Input VSWR	Small Signal Gain @Input Power -20dBm	Output Power @Input Power 0dBm		Efficiency @Input Power 0dBm	Current & Power Consumption @Input Power 0dBm		Third-Order Intercept Point (OIP3)	Harmonics @Input Power 0dBm	
			[dBm]	[W]		[A]	[W]		2nd	3rd
[MHz]	-	[dB]	[dBm]	[W]	[%]	[A]	[W]	[dBm]	[dBc]	
400	1.03	59.0	47.9	61.7	37.1	5.20	166	53.0	12.0	18.0
500	1.42	58.3	48.8	75.9	34.0	6.97	223	55.6	14.0	26.0
600	1.67	58.5	49.1	81.3	32.3	7.87	252	55.0	15.0	18.0
700	1.94	59.0	49.5	89.1	31.8	8.76	280	53.2	13.0	21.0
800	1.95	58.4	50.8	120.2	43.5	8.63	276	52.8	13.0	20.0
900	1.99	57.6	48.9	77.6	31.1	7.80	250	52.8	23.0	20.0
1000	1.92	57.1	49.1	81.3	35.3	7.19	230	51.8	15.0	25.0
1100	1.86	56.3	49.0	79.4	31.2	7.95	254	55.1	14.0	34.0
1200	1.92	55.4	48.6	72.4	26.0	8.72	279	55.9	14.0	39.0
1300	1.90	55.7	48.8	75.9	25.1	9.45	302	56.9	19.0	49.0
1400	1.82	57.2	49.5	89.1	30.1	9.24	296	56.1	24.0	46.0
1500	1.91	56.6	48.5	70.8	27.0	8.19	262	53.7	30.0	42.0
1600	1.78	56.4	48.5	70.8	30.3	7.30	234	53.3	29.0	71.0
1700	1.50	59.2	49.6	91.2	32.0	8.91	285	51.8	32.0	70.0
1800	1.42	60.2	49.0	79.4	27.7	8.95	286	52.6	41.0	52.0
1900	1.36	60.1	50.0	100.0	32.2	9.71	311	52.3	43.0	47.0
2000	1.51	59.9	49.6	91.2	30.4	9.36	300	52.1	56.0	50.0
2100	1.69	59.7	49.5	89.1	32.3	8.61	276	51.7	52.0	44.0
2200	1.90	59.4	49.1	81.3	32.6	7.78	249	51.3	52.0	41.0
2300	1.93	57.8	49.3	85.1	35.5	7.50	240	51.2	45.0	54.0
2400	2.07	56.7	49.2	83.2	36.1	7.21	231	52.1	66.0	60.0
2500	2.21	56.9	48.9	77.6	34.2	7.10	227	52.6	78.0	58.0
2600	2.12	58.3	48.6	72.4	30.4	7.45	238	52.9	56.0	47.0
2700	1.76	58.3	49.0	79.4	29.2	8.50	272	52.7	45.0	36.0

Product Dimensions

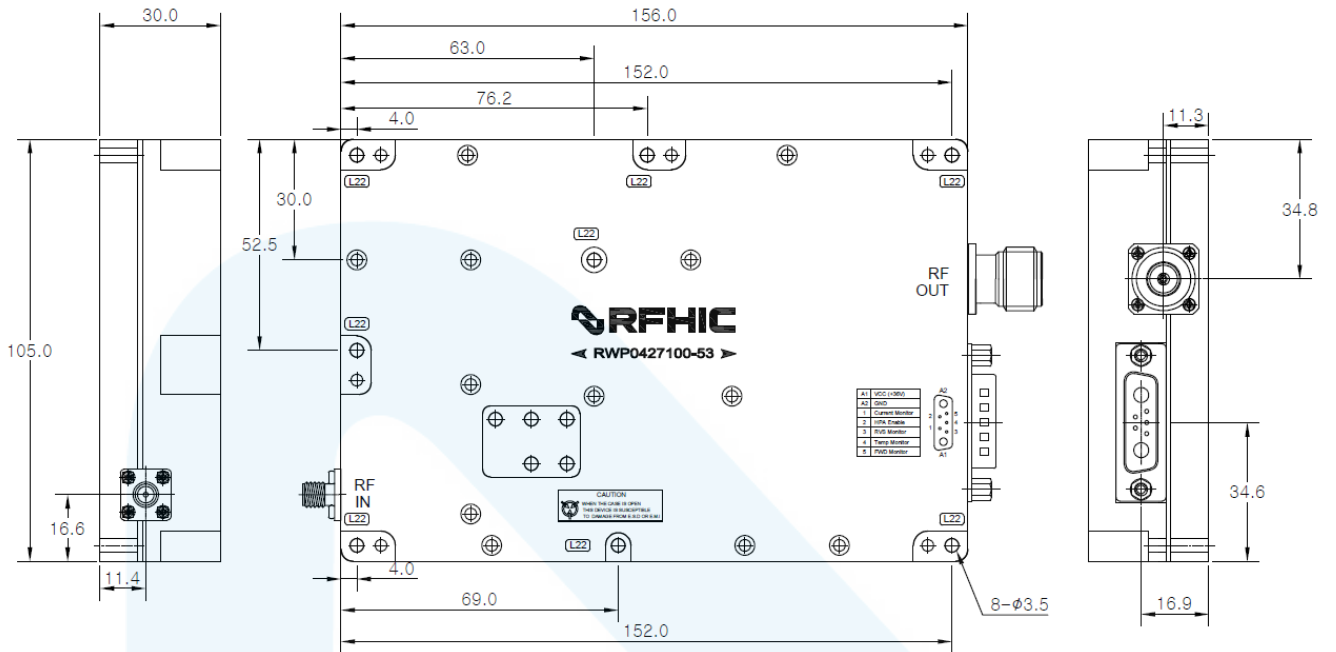

Pin Description (7W2 / D-SUB / Male type)			
Pin No	Description	I/O	Specifications
A1	Vcc	I	+32VDC
A2	GND	I	Ground
1	Current Monitor	O	Reference voltage : 500mV @ 0A Analog voltage relative to IDD @20mV / 100mA
2	HPA Enable	I	Enable : TTL "High", Disable : TTL "Low" (Low : 0 ~ 0.5V, High : 2.5 ~ 5V) Disable Status : 200mA Current consumption
3	NC	-	-
4	Temp Monitor	O	Reference voltage : 750mV @ 25°C, Scale : 10mV/°C
5	NC	-	-

Mechanical Specifications

PARAMETER	UNIT	TYP
Dimension	mm	156(L) x 105(W) x 30(H)
Weight	g	740
RF Connector	-	RF Input : SMA Female
		RF Output : N-Type Female
DC Connector	-	C7W2 / D-SUB / Male type
Cooling	-	External Heat-sink

* Recommended Screw Torque : 8.0kgf.cm \pm 1 using SEMS M3 22mm Bolt



Revision History

Part Number	Release Date	Version	Modification	Data Sheet Status
RWP0427100-53	2025.11.03	0.1	-	Preliminary
RWP0427100-53	2026.05.12	0.2	Typical Performance update	Preliminary

Precautions

1. This product is designed to be used for broadband amplification. Heat generation is higher when there is RF signal in the device. Therefore, the worst case scenario is when there is RF signal.
The temperature must be calculated properly.
Case temperature must maintain below 70°C.
2. Thermal Grease or Metal Thermal Interface Materials are recommended for heat dissipation. An example would be spreading thermal grease on the bottom of the device.



Certification

This product is manufactured by a company that is certified for the AS9100D quality management system.

RFHIC Corporation reserves the right to make changes to any products herein or to discontinue any product at any time without notice. While product specifications have been thoroughly examined for reliability, RFHIC Corporation strongly recommends buyers to verify that the information they are using is accurate before ordering. RFHIC Corporation does not assume any liability for the suitability of its products for any particular purpose, and disclaims any and all liability, including without limitation consequential or incidental damages. RFHIC products are not intended for use in life support equipment or application where malfunction of the product can be expected to result in personal injury or death. Buyer uses or sells such products for any such unintended or unauthorized application, buyer shall indemnify, protect, and hold RFHIC Corporation and its directors, officers, stockholders, employees, representatives and distributors harmless against any and all claims arising out of such unauthorized use. All sales inquiries and support should be directed to the local authorized geographic distributor for RFHIC Corporation. For customers in the US, please contact the US sales team through our website at <https://rfhicusa.com/>. For all other inquiries, please contact our international sales team through our website portal at <https://rfhic.com/contact/>