

Preliminary

Wideband Power Amplifier

RWP1516100-57



Product Features

- Frequency from 1550 to 1610 MHz
- Class AB GaN HEMT Design
- Typ 100Watt CW
- 50% Efficiency at CW 100W
- 50 ohm Input / Output impedance matched
- Pb Free / RoHS Standard

Applications

- Radar-Systems
- Jamming-Systems
- Drones/UAVs Systems
- Satellite Communication

Description

RFHIC's GaN Power Amplifier Pallet is a Flanged type product which includes all matching for the convenience of customers. RWP1516100-57 is a Wideband Power Amplifier covering the 1550 to 1610 MHz frequency range.

Electrical Specifications @ $V_{DD} = 48V$; $T_c = 45^\circ C$; $Z_S = Z_L = 50\Omega$

PARAMETER	UNIT	MIN	TYP	MAX	CONDITION
Frequency	MHz	1550		1610	-
Small Signal Gain	dB		62		@ $P_{IN} = -20dBm$
Small Signal Gain Flatness	dB		± 0.5	± 1	@ $P_{IN} = -20dBm$
Input Power (P_{IN})	dBm		-12	11	@ $P_{out} = 100W$
Output Power (P_{SAT})	W	130	150		-
1dB Gain Compression Point Output Power (P_{1dB})	dBm	49	50		-
Input Return Loss	dB		-15	-13	S11
Output Return Loss	dB		-15	-13	S22
Efficiency	%	48	50		@ $P_{out} = 100W$
Supply Voltage	V		48		
Quiescent Current (I_{DQ})	A		0.25	0.3	$V_{DD} = 48.0V$
Current Consumption (I_{DD})			4.2	4.4	@ $P_{out} = 100W$
Third Order Intercept Point	dBm	48	50		2-Tone @ 34dBm/Tone, 100kHz Spacing
Harmonics @ $P_{out} = 100W$	dBc	-25	-35		2 nd
		-40	-45		3 rd
Spurious Signals	dBc		-70		

NOTE

*Measured for the $P_{out} = 100W$, $T = 45^\circ C$, T_c (Case Temperature) $= 50^\circ C$ (Temp DET, Pin 6 $= 1.0V \pm 0.05$), $V_{DD} = +48V$, 50Ω system

Preliminary
Wideband Power Amplifier
RWP1516100-57



Absolute Maximum Ratings

PARAMETER	UNIT	RATING
Input RF Power	dBm	0
Supply Voltage	V	50
Load Mismatch Value	-	3:1 @all load phase

*Input Signal Condition : CW 1-Tone

Environmental Characteristics

PARAMETER	UNIT	MIN	TYP	MAX	Condition
Operating Flange Temperature	°C	-30	-	+60	
Storage Temperature	°C	-40	-	+85	



Preliminary

Wideband Power Amplifier

RWP1516100-57



Product Dimensions

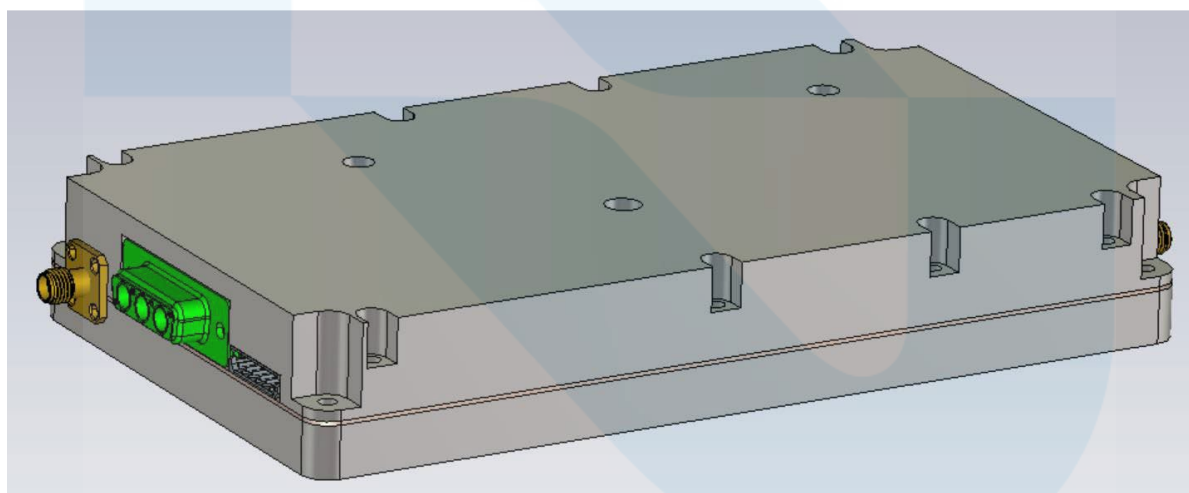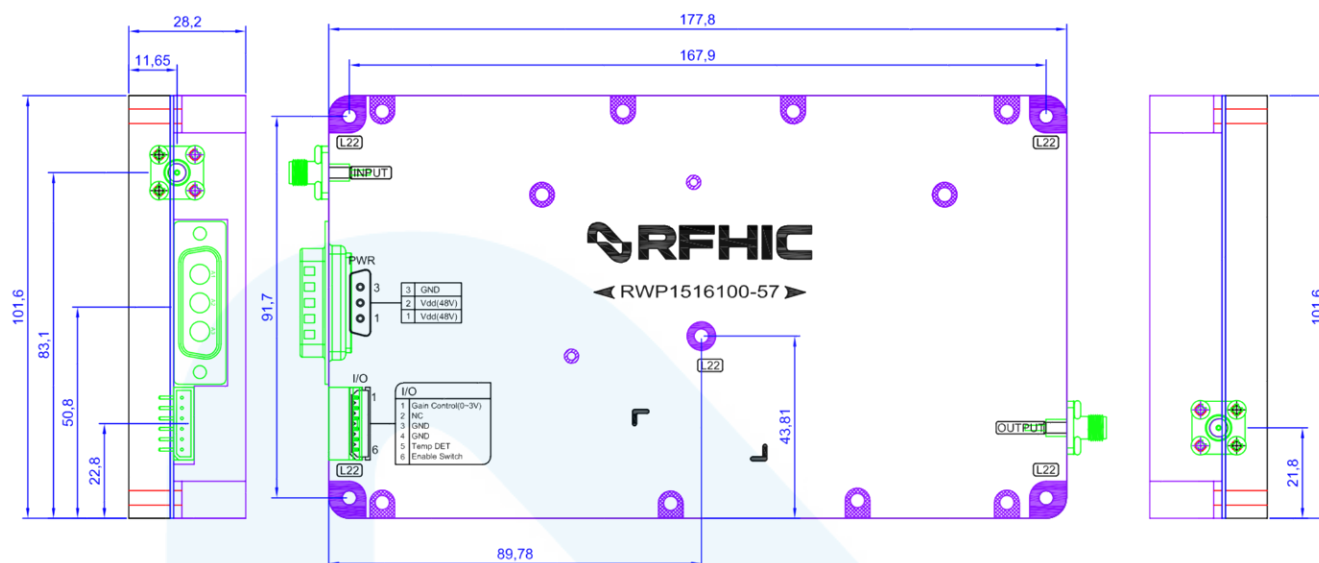

* Unit: mm[inch] | Tolerance: ± 0.2 [.008]

Mechanical Specification

PARAMETER	Units	Value
Dimensions	mm	220 x 196 x 31.1
RF Input Connector		SMA(Female)
RF Output Connector		N-type(Female)
I/O Connector		SMAW250-06P 6pin(Male)
		3W3/D-SUB(Female)
Cooling		External Heat-Sink Required

NOTE

- Connector position and module mount holes may be subjected change.

Preliminary

Wideband Power Amplifier

RWP1516100-57



Interface Connector

3W3 D-SUB

Pin #	Description	Specifications
1	+V _{DD}	+48V
2		
3	GND	GROUND

Terminal Connector 6Pin-Control [SMAW250-06P]

Pin #	Description	Specifications
1	Gain Control	Control Voltage : 0 ~ +3V
2	NC	
3	GND	GROUND
4		
5	Temp DET	Temp Sense(LM50, Temp=(V _{out} -500mV) °C/10mV)
6	Enable Switch	TTL High : Amp Enable(+5V) TTL Low : Amp Disable(+0V)



* For Mating Connector Use SMH250-06 Series.



RFSA2033

Measured Negative Attenuation Slope Performance

Note: 50Ω Application Circuit – Data includes PCB and connector losses

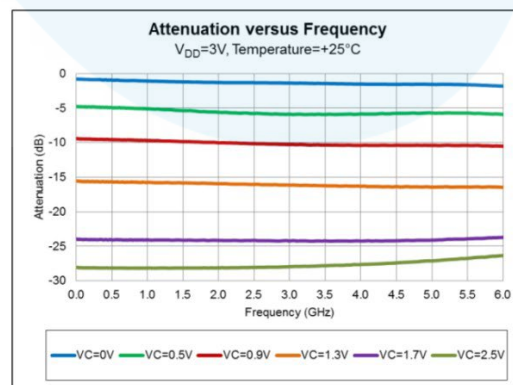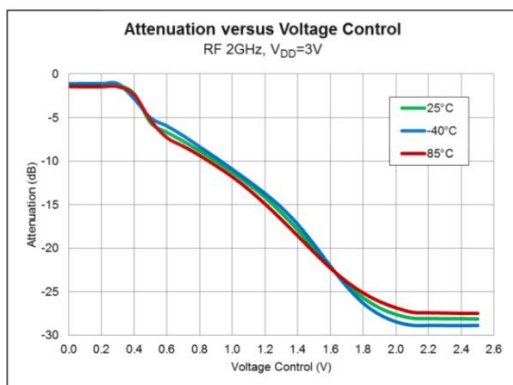

Preliminary
Wideband Power Amplifier
RWP1516100-57



Revision History

Part Number	Release Date	Version	Modification	Data Sheet Status
RWP1516100-57	04.29.2026	0.1	Initial Release	



Certification

This product is manufactured by a company that is certified for the AS9100D quality management system.

RFHIC Corporation reserves the right to make changes to any products herein or to discontinue any product at any time without notice. While product specifications have been thoroughly examined for reliability, RFHIC Corporation strongly recommends buyers to verify that the information they are using is accurate before ordering. RFHIC Corporation does not assume any liability for the suitability of its products for any particular purpose, and disclaims any and all liability, including without limitation consequential or incidental damages. RFHIC products are not intended for use in life support equipment or application where malfunction of the product can be expected to result in personal injury or death. Buyer uses or sells such products for any such unintended or unauthorized application, buyer shall indemnify, protect, and hold RFHIC Corporation and its directors, officers, stockholders, employees, representatives and distributors harmless against any and all claims arising out of such unauthorized use. All sales inquiries and support should be directed to the local authorized geographic distributor for RFHIC Corporation. For customers in the US, please contact the US sales team through our website at <https://rfhic.com/rfhic-us/>. For all other inquiries, please contact our international sales team through our website portal at <https://rfhic.com/contact/>

Korean Facility : +82-31-8069-3000 / www.rfhic.com

US Facility : +1-919-677-8780 / www.rfhic.com/rfhic-us/

All specifications may change without notice